

40K45G-A

Mobile, Self-Contained Emergency Safety Shower

The 114 liter (30 US Gallon) capacity unheated mobile self-contained emergency safety shower with eye/face wash unit. Suitable as a secondary safety measure to supplement permanent installations and capable of delivering a constant flow of water for 1-1/2 minutes. The design features a polypropylene lined cylinder, a stainless-steel frame and large pneumatic tires, making it easy to maneuver by one person.

Options:

- Hand-held eye, face and body shower
- Retrofittable insulated jacket - offers frost protection
- Retrofittable heated jacket - prevents water within the tank freezing

Specifications



MATERIALS OF CONSTRUCTION

PIPEWORK & FITTINGS	Stainless-steel
OPERATING VALVE	Stainless-steel
SHOWER NOZZLE	UPVC
STANDARD FINISH	White gloss powder coated tank (RAL 1013)

SERVICES

CAPACITY	30 US Gallons (114 liters)
WATER INLET	1/2" quick release hose connector
DESIGN OPERATING PRESSURE	3 to 5.5 BAR G (29 to 87 PSI)
MINIMUM FLOW RATES	Shower - 20 US Gallons/minute (76 liters). Eye/face wash - 3 US Gallons/minute (12 liters)

AMBIENT OPERATING TEMPERATURE

MINIMUM	41F (5C)
---------	----------

OPERATION

SHOWER	Hand lever
EYE/FACE WASH	Pull lid forward

DIMENSIONS & WEIGHT

DIMENSIONS (WxDxH)	Assembled: 734mm (28.8in) x 1462mm (57.5in) x 2348mm (92.4in)
WEIGHT	80kg (176lb)




Justrite Safety Group

Rev1 080320

hughes-safety-showers.com

Mobile Self-Contained Emergency Safety Shower

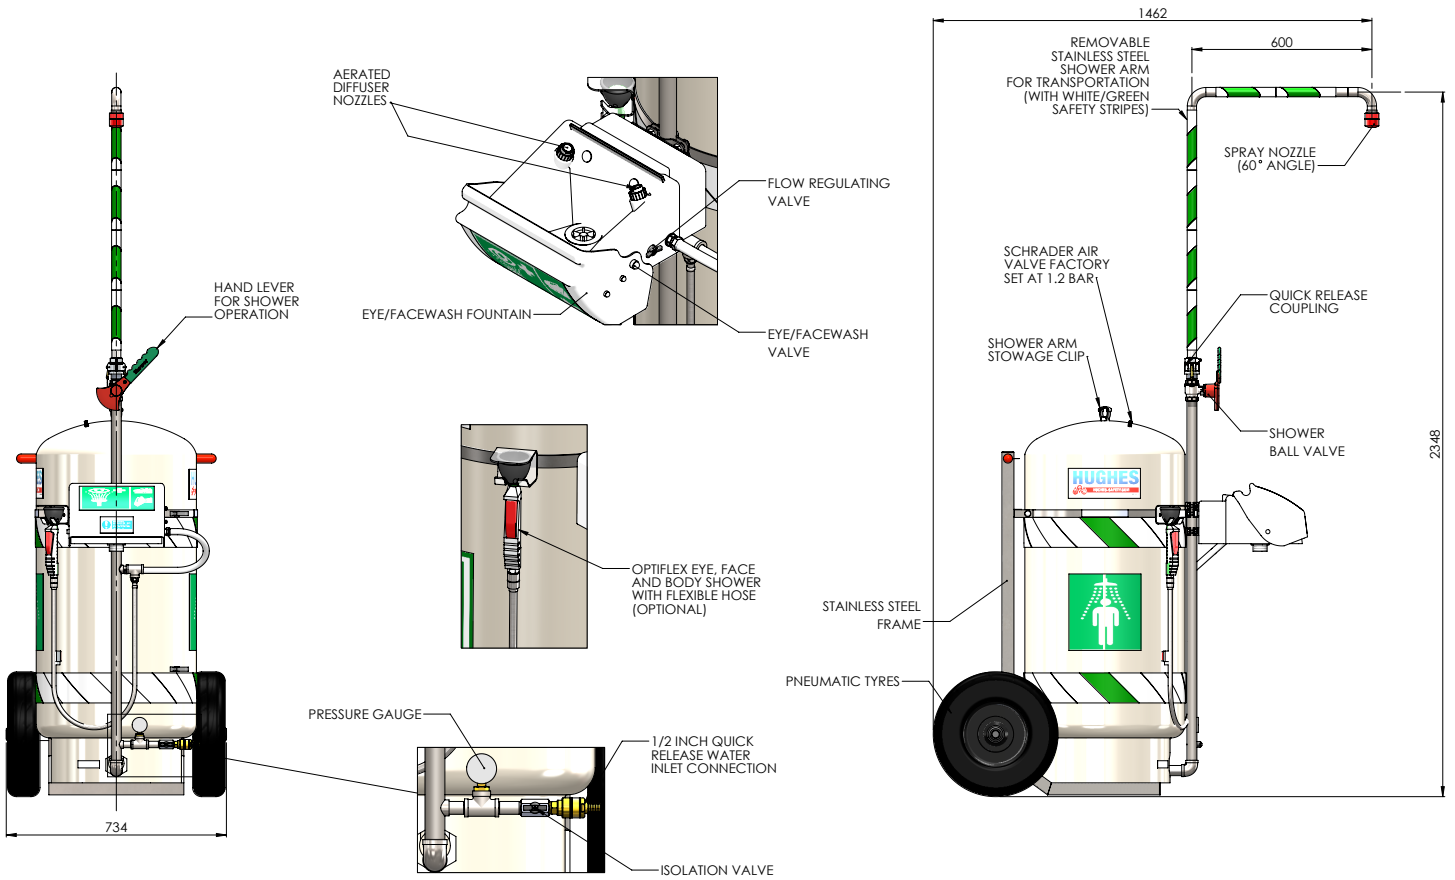

For Technical Support Contact:
 customer.service@hughes-safety.com • 1-866-312-1652

For Reorder & Sales Support Contact:
 custserv@justrite.com • 1-800-798-9250

HUGHES

HUGHES-SAFETY-SHOWERS.COM
 Justrite Safety Group

Hughes North America
 457 Campbell Street
 Sarnia, Ontario N7T 2J1, Canada.

Registered No. 0939240. VAT Registration No. 918 5005 32 ©2020 Hughes Safety Showers